



TAIWAN: 19F-1, No.266, Sec, 1, Wen Hwa 2nd Rd., Linkou.
Taipei Hsien, Taiwan

TEL:886-2-2600-7203 FAX:886-2-2600-7680
EMAIL fairland@fairland.com.tw

CHINA: No.6, Shilou Section, Shilain Road, Panyu District,
Guangzhou, Guangdong, China.

TEL:86-20-8486-2062 FAX:86-20-8486-0791

USA: 102 Greenpoint Avenue, Apt. 3R, New York,
Brooklyn, USA.


TEL: 17183833936 FAX: 17183833936



2003.01.5000




GB ASSEMBLING INSTRUCTIONS



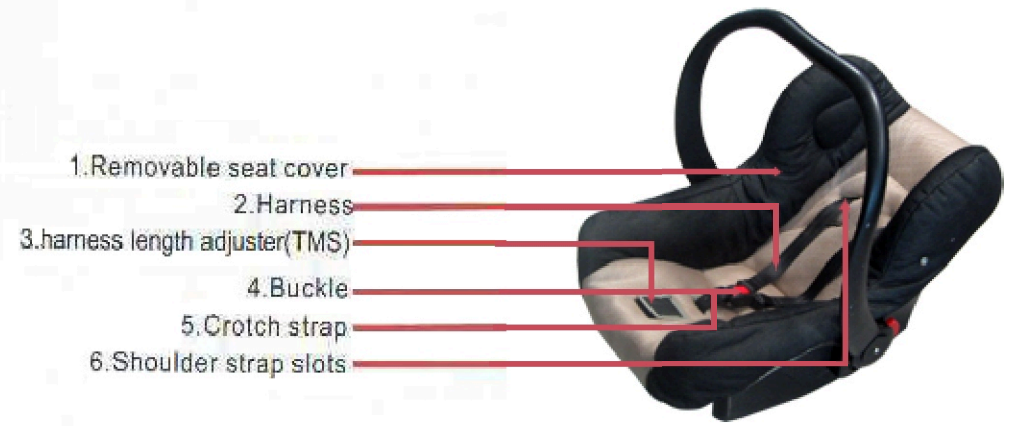

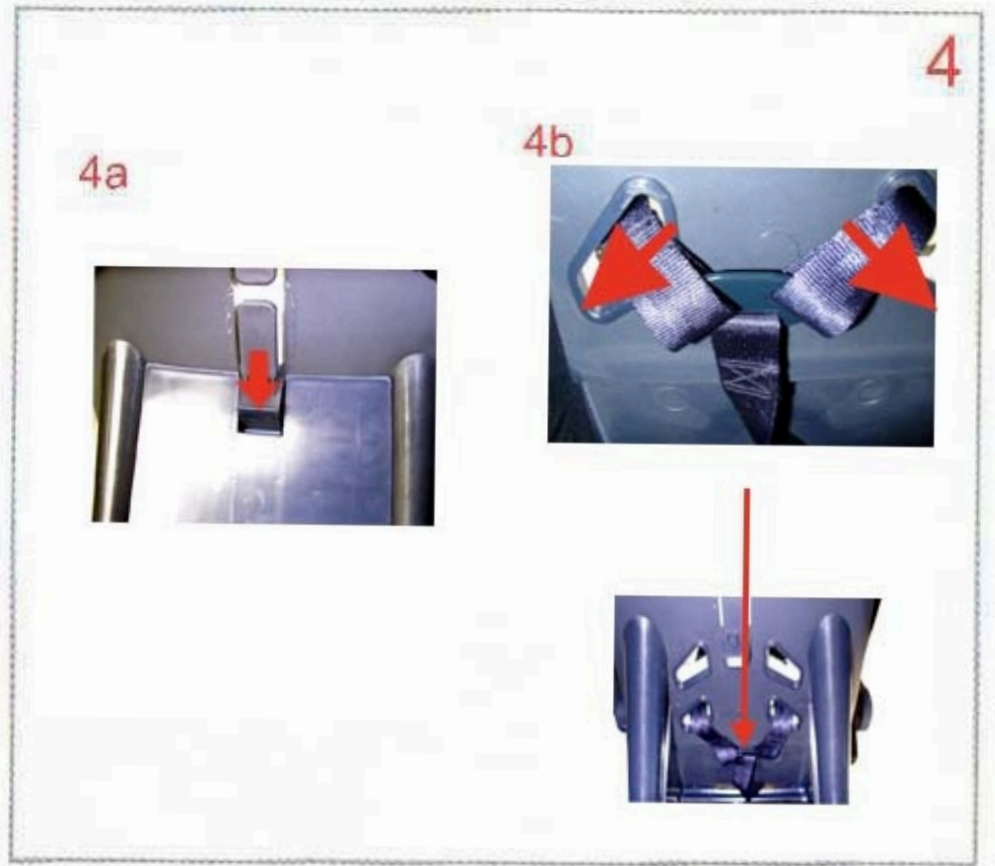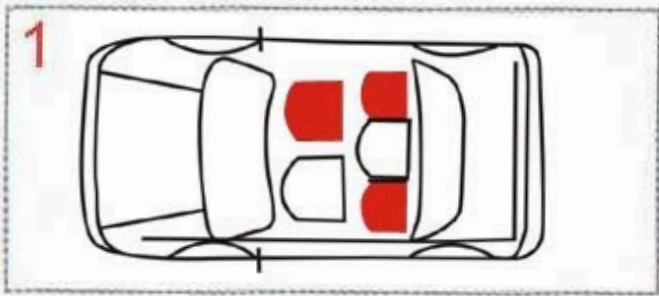

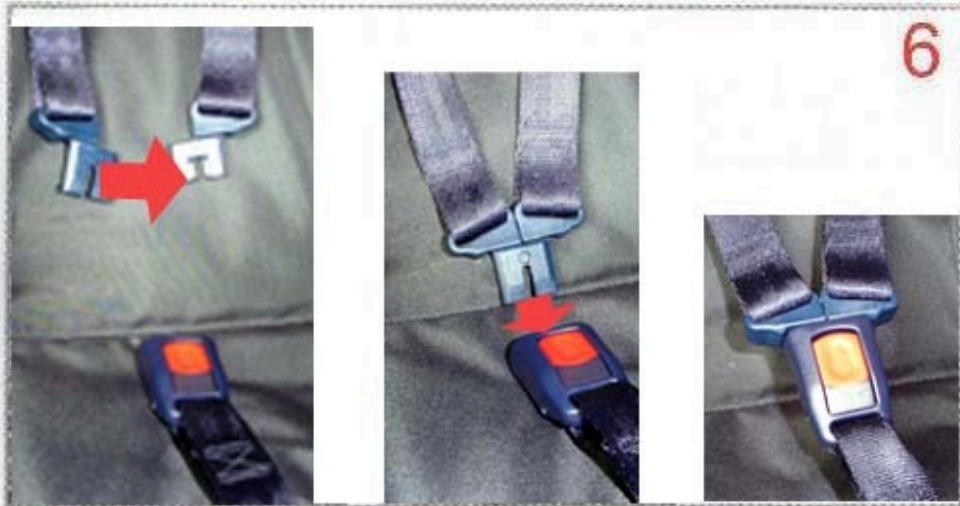

READ THIS INSTRUCTIONS CAREFULLY

This car seat has been designed and approved for children from birth to 15 months old (up to a weight 13kg).

The safety seat must be always placed in a rearward facing position. The seat must be fastened in the car with an three point belt with or without retractor. to be approved according to ECE regulation No.16 or equivalent standard and it can be placed on the front(except)cars fitted with passenger AIRBAG) or rear seat or the car(fig.1)

SECURING THE BABY-CARRIER(fig.2)

- 1.Place the handle in position 1(see changing the handle position0).
- 2.Secure the buckle of the car seat belt and pass the waist strap through the front strap guides(fig.2a).
- 3.Pass the chest strap through the back strap guide(fig.2b).Have in mind that the strap goes under the handle (fig 2c)
- 4.Recline the seat until the handle resets on the back car seat as shown in(fig.3)
- 5.Tighten the belt pulling form the strap that goes around the chest.

ADJUSTING THE SHOULDER STRAPS (fig.4)

Place your baby-carrier to make sure that the shoulder straps are threaded through one of the three sets of slots nearest to your child's shoulders. To change the position of the straps according to the child is age you will have to open the cover of the compartment, see in (fig-4B) how to change shoulder straps. To open the cover of the compartment, press the plastic release catch and pull outwards(fig.4A)

HARNESS ADJUSTMENT (fig6)

It is recommended to adjust harness length to child size before fitting the child seat in car. To tighten the shoulder straps, pull at the end of the belt to the tensor straps TMS until getting the adjustment wished(A).

To slacken the shoulder straps the TMS in the Barrow direction and pull the shoulder straps with the other hand. NOTE Harness must be reasonably tight, it should restrain but not make child uncomfortable. Check that no strap is twisted while child is seated

FASTENING THE HARNESS BUCKLE(fig 6)

To close the harness buckle, check shoulder straps joint the two parts and introduce the female part with red button and push until hearing a "click" sound. To open push red button.

CHANGING THE HANDLE POSITION(fig 7)

The handle can be placed in 4 different position:

1. Car position.
2. Transport position.
3. Rocker position.
4. Feeding position.

To change positions simply press the two red buttons and move the handle rearward or forward.

REMOVE THE SEAT COVER

- 1.Untighten the TMS.
- 2.Remove the straps from the distribution plate (fig. 4B). Then remove the buckle located at the front of the seat(fig.8).

NOTE: Never take out the interior protection in the absorbent material.

WASHING INSTRUCTIONS

Wash your seat upholstery as that of your car by gently rubbing with dry soap. Lacquered and plastic parts should be cleaned with a polisher free of abrasives or solvents.

IMPORTANT SAFETY INFORMATION

- *Do not make unauthorized modifications to your baby-carrier.
- *It shall be recommended that the device should be changed when it has been subject to violent stresses in an accident
- *Take care that no part of the seat is damaged or crushed by reclining seats or pinched between car doors.
- *Always use your baby-carrier.
- *It shall be recommended that children are not left in the child restraint system unattended.
- *Never leave a child unattended in car.
- *When in the car the baby-carrier must always be secured with the car seat belt. Even when not in use.
- *If your car has been equipped with an airbag on a passenger seat. Do not use the baby-carrier as it can be dangerous. You should use the baby-carrier on a seat without an airbag.
- *Straps must never be twisted.
- *When the chair is not provided with a textile cover,it shall be recommended that the chair should be kept away from sunlight. Otherwise it may be too hot for the child's skin.
- *It shall be recommended that any luggage or other objects liable to cause injuries in the even of a collision shall be properly secured.
- *We guarantee the safety of the device when it is used by the first buyer. We advise not to use second hand products when it comes to safety.
- *Use extreme caution when installing this device, since a correct installation can save the life of your child in case of an accident (follow the instructions from the manufacture correctly).
- *It is important that other passengers of the vehicle have their seat belts fastened. Since in the event of an accident they could be thrown out of their seats and harm the baby.
- *Check the different parts of the chair regularly.
- *The child restraint must not be used with out the cover.
- *The seat cover should not be replaced with any other than the one recommended by the manufacturer. Because the cover constitutes an integral part of the restraint performance.
- *Don't seat the child without the harness.
- *These instructions should be safety stored in a place where they can be easily found.

NOTE

ONLY SUITABLE FOR USE IN THE VEHICLE AS EQUIPPED WITH A THREE POINT SAFETY BELT WITH OR WITHOUT RETRACTOR APPROVED TO UN/ECE 16 OR EQUIVALENT STANDARDS.

Generally, the following "NOTICE" must be print in the packing box.For safety purpose, we print it in the instructions for your reference.

NOTICE

- 1.This is a "Universal" child restraint. It is approved to Regulation No. 44, 03 series of amendments, for general use in vehicles and it will fit most, but not all car seats,
- 2.A correct, fit is likely ; if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this age group,
- 3.This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs which do not carry this notice.
- 4.If in doubt, consult either the child restraint manufacturer or the retailer.

GUARANTEES

FAIRLAND guarantees its safety seats for automobiles against any manufacturing defects for a period of 1 year, or 6 months for all other company products from the date of purchase.

- The guarantee does not include defects or dis orders produced by in appropriate use or non-compliance with the installation and maintenance safety norms described on the instruction leaflets come with the product.

- Repairs free of charge for any original defects and for the damages or prejudices caused by them.

- In the event that the repair carried out is not satisfactory and the object is not in optimum condition t fulfill the use to which it was destined. The holder of the guarantee will have the right to a substitution of the article for another of similar characteristics. Or to the full refund of the price paid.

- The guarantee is considered automatically cancelled if the article purchased has been repaired. Or tried to be repaired. By any person not authorised by our company.

Date and seal of the selling establishment

WARNING:

Suffocation Hazard: Infant carrier can roll over on soft surfaces and suffocate child. NEVER place carrier on beds, sofas, or other soft surfaces.

Strangulation Hazard: Child can strangle in loose restraint straps. NEVER leave child in carrier when straps are loose or undone.

Fall Hazard: Child's movement can slide carrier. NEVER place carrier near edges of counter tops, tables, or other elevated surfaces.

Read all instructions before use of the infant carries.

Do not use the infant carrier if it is damaged or broken.